




THE NEW FLAT FRAME PROFILE OFFERS THE SAME STRENGTH AND QUALITY EXPECTED FROM OUR SEVERE WEATHER PRODUCT.


- Flat profile for a wider range of architectural applications
- Low 3/8" profile
- No visible screw hole plugs—cover caps create a seamless finish on the interior of the home
- No shop-related Dow 995 application required
- Meets Florida Severe Weather requirements +/- 60 DP Design Pressure
- Product certification information available
Florida Building Code approval FL14935.5, .6, .7, .8.

ASSEMBLY VIEW


Completely remove the release liner from the tape in all locations prior to assembly into the door. Ensure the bonding area is clean, dry, and free of dirt, dust, oil, and any release agents.

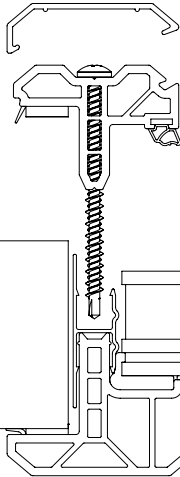


Assemble only with a #8-18 x 2.25" Philips pan head #2 self drilling zinc yellow screw. Tighten screws to a torque from 16.4 to 19 inch-pounds.

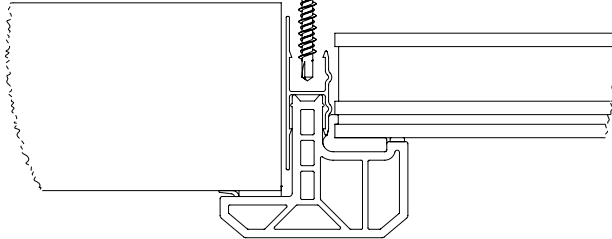

COVER INSTALLATION

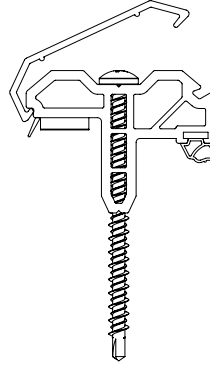

Hook cover, rotate to snap in place.

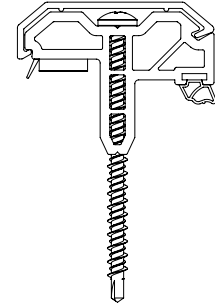

SIZES	
IG thickness	1.0" for Doorglass & 1.22" for Blinds + Glass
Doorglass	22x10, 22x36, 22x48, 7x64, 8x64, 14x64, 20x64, 22x60, 22x64, 8x80, 14x80, 20x80, 22x76, 22x80, 20x36, 25x15.25, 21.313x15.94, 22x15.25
Doors	1.66" to 1.80" thick
MATERIALS	
Spacer	Intercept®, tin plated steel or can be decoseal for decorative glass
IG Sealant	Dual seal equivalent, Deco seal w/ Poly backbed for decorative glass
Desiccant	Desiccant matrix (moisture and chemical management), Desiccant is part of the decoseal for decorative glass
Glass (interior)	1/8" tempered safety glass
Laminated glass	(2) 1/8" glass w/ .090" PVB inner layer
Laminated glass (gray)	1/8" clear glass, .090" PVB inner layer, 1/8" turtle compliant glass
Laminated glass (Low-E)	1/8" clear glass, .090" PVB inner layer, 1/8" hard coat Low-E glass
Laminated glass (deco)	(2) 1/8" glass w/ .090" PVB inner layer
Frame	uPVC
Cover Caps	uPVC

CODE COMPLIANCE

IGCC (seal)	ASTM E2190 seal certification
ANSI (interior glass)	ANSI Z97.1 safety glazing
ASTM (laminated glass)	ASTM C1172
ASTM (interior glass)	ASTM C1036 & C1048 temper
MDCA (PVB interlayer)	Interlayer is Miami Dade County Approved
Sea Turtle code compliant	Meets sea turtle regulations for reducing light transmission
ASTM (frames)	Florida Building Commission FL14935.5-8
HVHZ (doorglass)	HVHZ DP +/- 60
STC (doorglass)	STC 37 dB
ENERGY STAR®	Can use in doors to meet ENERGY STAR® criteria

OPERATION

Capillary tube	Do not block, crush or cut
----------------	----------------------------

MAINTENANCE

Glass/Frame	See label instructions
Screws & Cover Caps	22-pack screws #31423022 Service packs of pre-cut to length cover caps, 10 pieces in each pack

WARRANTY

20 year limited glass seal warranty



215 E ROOSEVELT AVE
ZEELAND, MI 49464
800.253.3900 · odl.com/catalog