



BLINDS + GLASS
PRODUCT BROCHURE



THE BEST-SELLING BLINDS BETWEEN GLASS.

SOLUTIONS FOR SLIDING PATIO DOORS AND WINDOWS

From the creation of the first doorlight on record in the early 1950s, ODL has been committed to innovation in building materials and manufacturing. For more than 20 years, we've led the blinds-between-glass category by developing solutions that address the safety, cleaning, and usability concerns of traditional blinds.

ODL Blinds + Glass gives homeowners a modern way to control light and privacy in sliding patio doors and windows. Available in custom sizes and colors in as few as eight days, it delivers the quality, reliability, and warranty customers expect from ODL.

Safety is a top priority. ODL Blinds + Glass holds certifications from two leading child-safety organizations—Best for Kids™ and Parents for Window Blind Safety™—which advocate for cordless window coverings that reduce risks to children and pets.

For builders, manufacturers, and dealers, Blinds + Glass expands product offerings while creating opportunities for higher-margin solutions. Backed by a 10-year full replacement warranty and designed for long-term performance, it coordinates with entry doors and patio doors for a cohesive look across the home.

With five color options and applications ideal for kitchens, dining areas, baths, large-format windows, and family rooms, ODL Blinds + Glass delivers safer, lower-maintenance light and privacy solutions for today's homes.


With ODL Blinds + Glass, the possibilities are endless.





SINGLE AND DOUBLE
HUNG WINDOWS

7/8" BLINDS + GLASS RLT-TOP
FOR WINDOWS

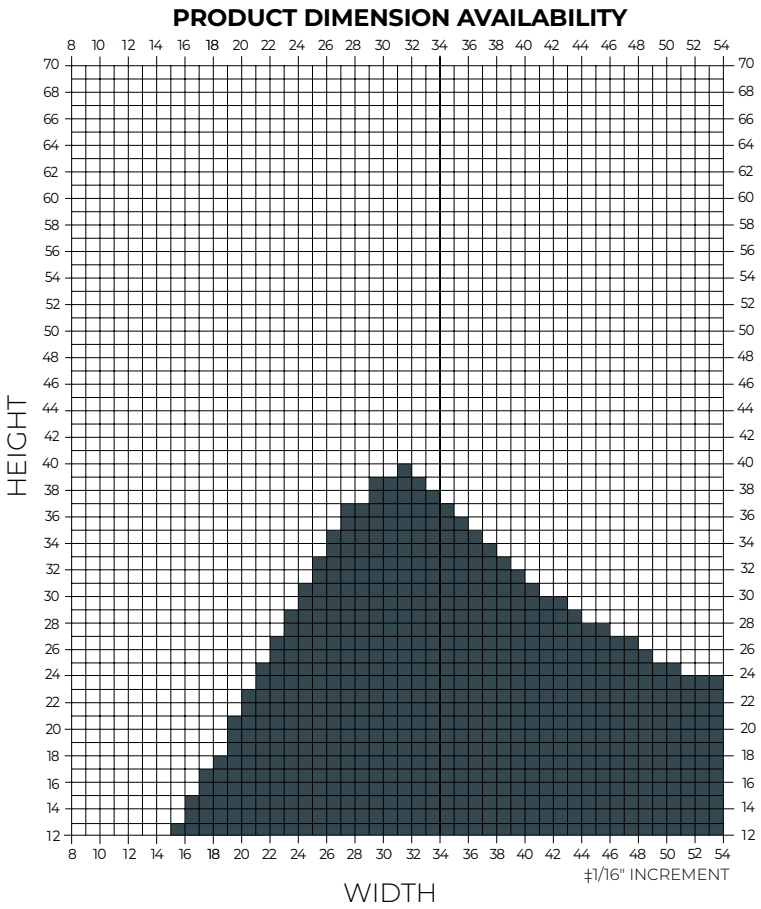

7/8" RLT -TOP ANNEALED
& TEMPERED

Single Operator
Max IG Size: 9 ft²

PRODUCT FEATURES:

- Ideal for single and double hung windows
- Symmetric privacy channels
- EasyGlide operator located top center (single operator)

Low-E Options:

- Single: 270, 272, 340, 366
- Dual: 189/270, 189/272, 189/340, 189/366

Glass Tint Options:

- Solar Gray and Solar Bronze

Warranty:

- 10-Year Warranty

PROGRAM DETAILS:

Dimensions:

- 15" – 54" wide
- 12" – 41" tall
- IG Thickness : 7/8" or 1" (with 6mm external glass option)
- Only one dimension may exceed 36"


Glass Options:

- Tempered or Annealed Glass - up to 9 ft²

Customization:

- Size increments 1/16" (height & width)
- Minimum Quantity: 1

AVAILABLE COLORS:

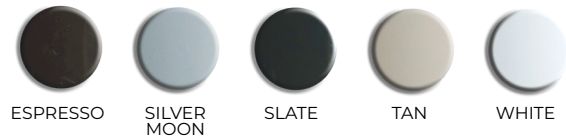


OPERATOR:



EasyGlide Operator
0.512" thickness



7/8" BLINDS + GLASS
FOR SLIDING PATIO DOORS AND WINDOWS

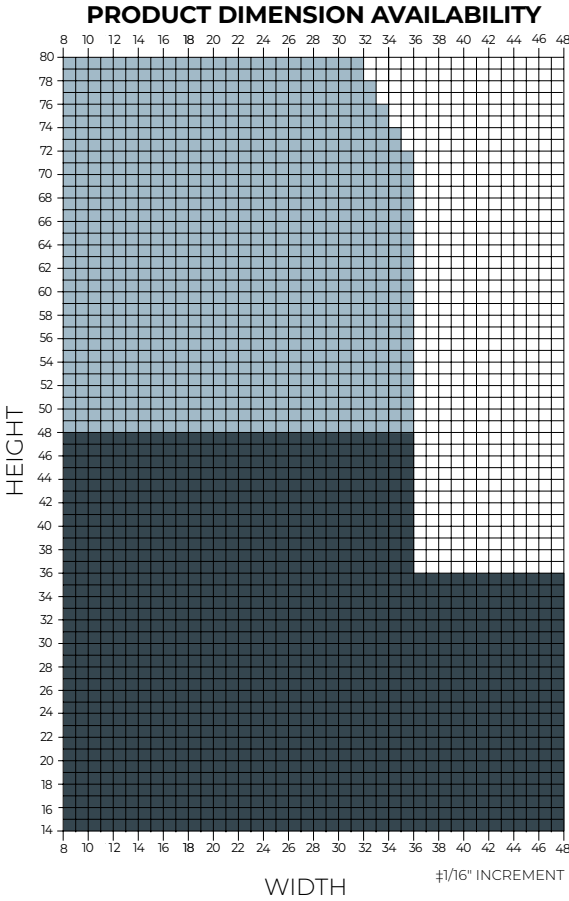

7/8" ANNEALED
& TEMPERED

- Dual operator
Max IG Size: 18ft²
Min Height: 48"
*Tempered Only Greater Than 15ft²
- Single Operator
Max IG Size: 12 ft²
48" or Less in Height

PRODUCT FEATURES:

- Designed for sliding patio doors and windows
- Compatible with awning, casement, fixed, sliding, and bay windows

Flexible Control & Configuration Options:

- EasyGlide operator with left- or right-hand placement
- Symmetric or asymmetric privacy channel configurations
- High or low operator position available for single operator above 32" high

Low-E Options:

- Single: 270, 272, 340, 366
- Dual: 189/270, 189/272, 189/340, 189/366

Glass Tint Options:

- Solar Gray, Solar Bronze

Warranty:

- 10-Year Warranty

PROGRAM DETAILS:

Dimensions:

- Width: 8" – 48"*
- Height: 18" – 80"
- Only one dimension may exceed 36"
- Widths under 10" feature an asymmetric design

Glass Options:


- IG Thickness: 7/8" or 1" (with 6mm external glass option)
- Tempered Glass: up to 18 sq. ft.*
- Annealed Glass: up to 15 sq. ft.*

Customization:

- Custom sizing in 1/16" increments (height & width)
- Operator location: Left or Right
- Minimum order quantity: 1

*Subject to size limitations noted above.

OPERATORS:



EasyGlide Operator
0.539" thickness

AVAILABLE COLORS:




ESPRESSO SILVER MOON SLATE TAN WHITE



1" BLINDS + GLASS
FOR SLIDING PATIO DOORS AND WINDOWS

PRODUCT DIMENSION AVAILABILITY

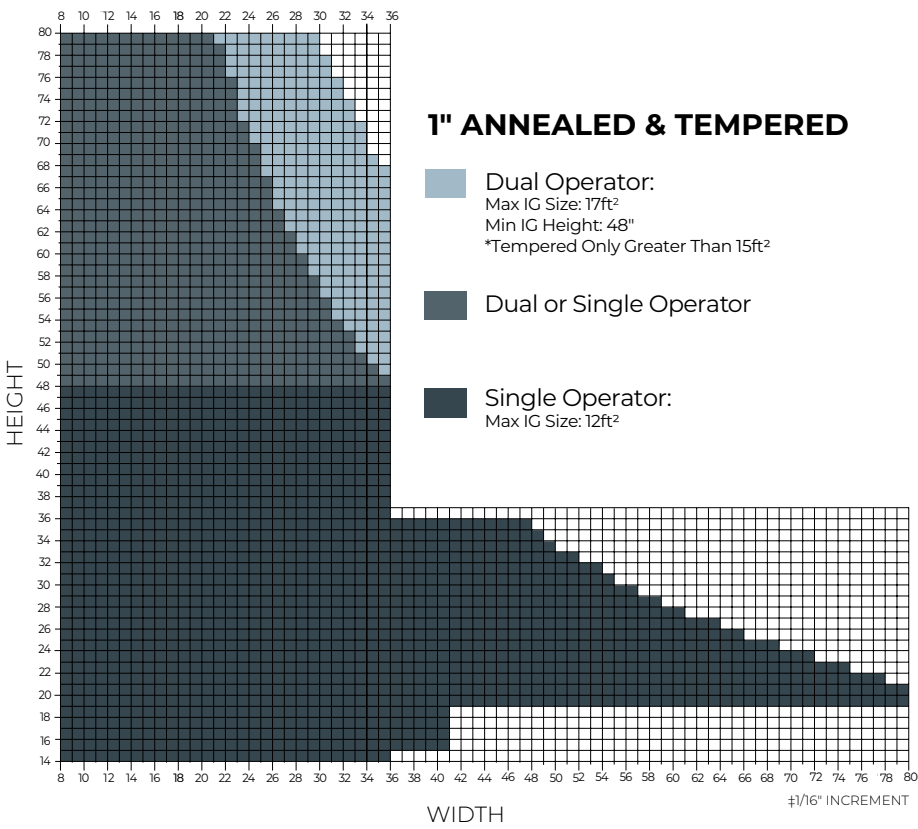

PRODUCT FEATURES:

- Ideal for use in both sliding patio doors and various window types, including awning, casement, fixed, sliding, and bay windows
- Symmetric or asymmetric privacy channel options

Flexible Control & Configuration Options:

- EasyGlide or SlimLine operator with left- or right-hand placement
- High or low operator position for single operator above 32" high

Low-E Options:

- Single: 270, 272, 340, 366
- Dual: 189/270, 189/272, 189/340, 189/366

Glass Tint Options:

- Solar Gray and Solar Bronze

Warranty:

- 10-Year Warranty

PROGRAM DETAILS:

Dimensions:

- 8" – 80" wide
- 14" – 80" tall
- Only one dimension may exceed 36"
- Widths under 10" feature an asymmetric design

Glass Options:


- IG Thickness : 1" or 1 ½" (with 6mm external glass option)
- Tempered glass - up to 17 ft²*
- Annealed glass - up to 15 ft²*

Customization:

- Custom size increments 1/16" (height & width)
- Operator location - Left or Right
- Minimum quantity: 1

*Subject to size limitations noted above.

AVAILABLE COLORS:

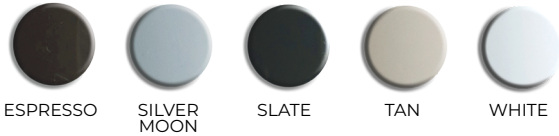

OPERATORS:



EasyGlide
Operator
0.539"
thickness



SlimLine
Operator
0.323"
thickness
(White Only)



CASEMENT/FIXED



SLIDING



SWING



AWNING




SLIDING PATIO DOORS



1" BLINDS + GLASS XL
FOR SLIDING PATIO DOORS AND WINDOWS

PRODUCT DIMENSION AVAILABILITY

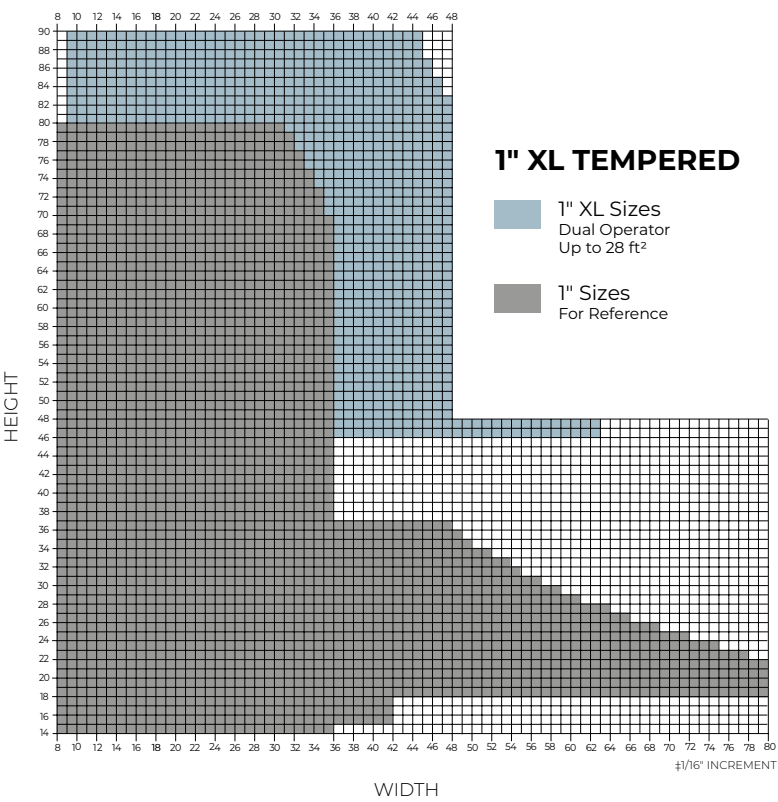

PRODUCT FEATURES:

- Ideal for use in both sliding patio doors and various window types, including awning, casement, fixed, sliding, and bay windows
- Symmetric or asymmetric privacy channel options
- EasyGlide left- or right-hand operator location

Low-E Options:

- Single: 270, 272, 340, 366
- Dual: 189/270, 189/272, 189/340, 189/366

Warranty:

- 10-Year Warranty

OPERATORS:



EasyGlide Operator
0.539"
thickness

PROGRAM DETAILS:

Dimensions:

- 9" – 63" wide
- 46" – 90" tall
- Only one dimension may exceed 48"

Glass Options:

- IG Thickness: 1"
- Tempered glass only - up to 28 ft²

Customization:

- Custom size increments 1/16" (height & width)
- Operator Location - Left or Right
- Minimum Quantity: 1

AVAILABLE COLORS:



CASEMENT/FIXED

SLIDING


SWING

AWNING

SLIDING PATIO DOORS


7/8" BLINDS + GLASS RLT-TOP
FOR WINDOWS

Technical Drawings & Specifications

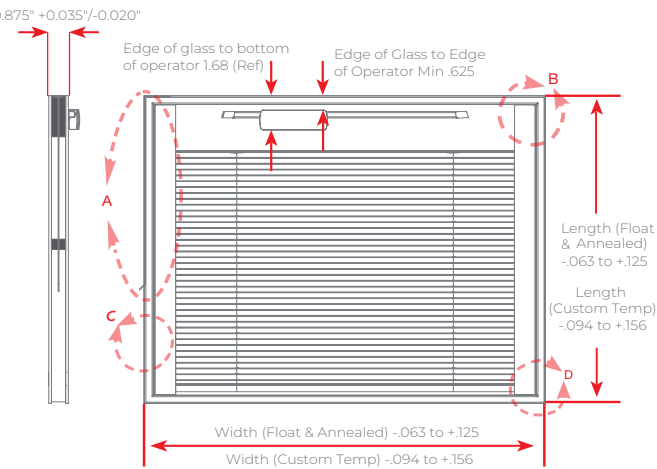

OPERATION	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	Annealed glass: Up to 9 ft² or Tempered glass: Up to 9 ft²
Capillary Tube	Do not block, crush or cut
Operator Position	Top Center


CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036 (Annealed) & C1048 (Tempered)
ANSI (safety)	ANSI / WCMA A100.1
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

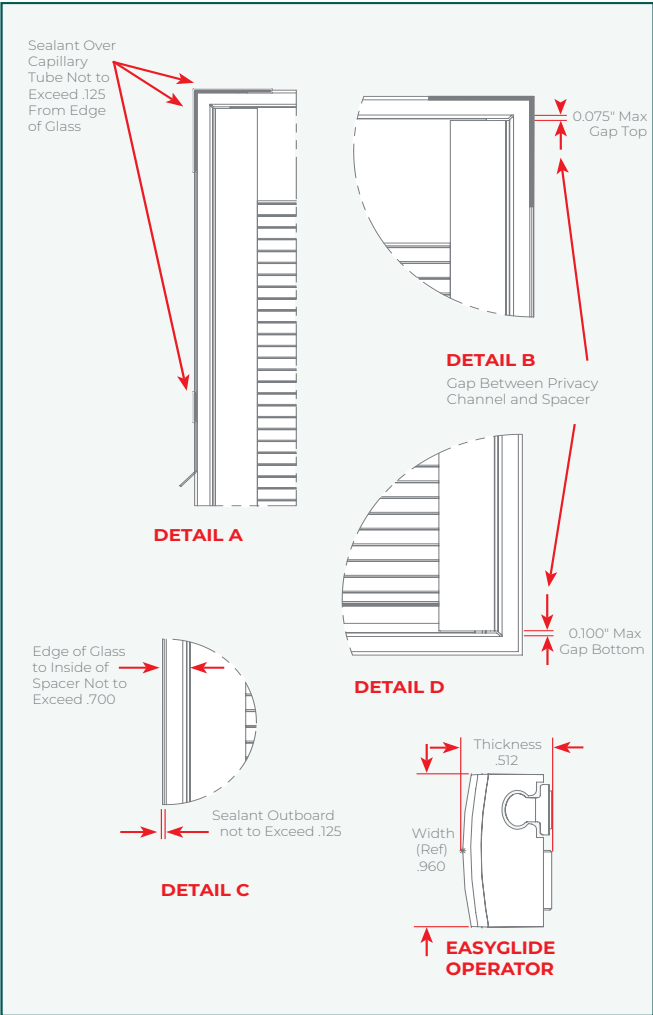

MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Clear or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (i89)
Glass Tint	Solar Gray or Solar Bronze glass panel
Blind Slat	10mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer


7/8" BLINDS + GLASS
FOR SLIDING PATIO DOORS AND WINDOWS

Technical Drawings & Specifications

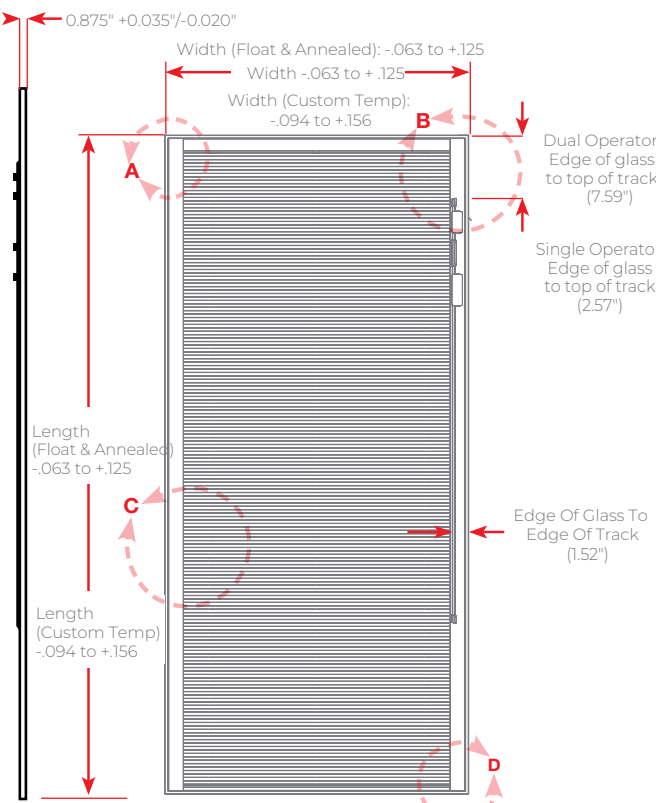

OPERATION	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	48" or less in height
Dual Operator	48" or greater in height
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 32" in height)


CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036 (Annealed) & C1048 (Tempered)
ANSI (safety)	ANSI / WCMA A100.1
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

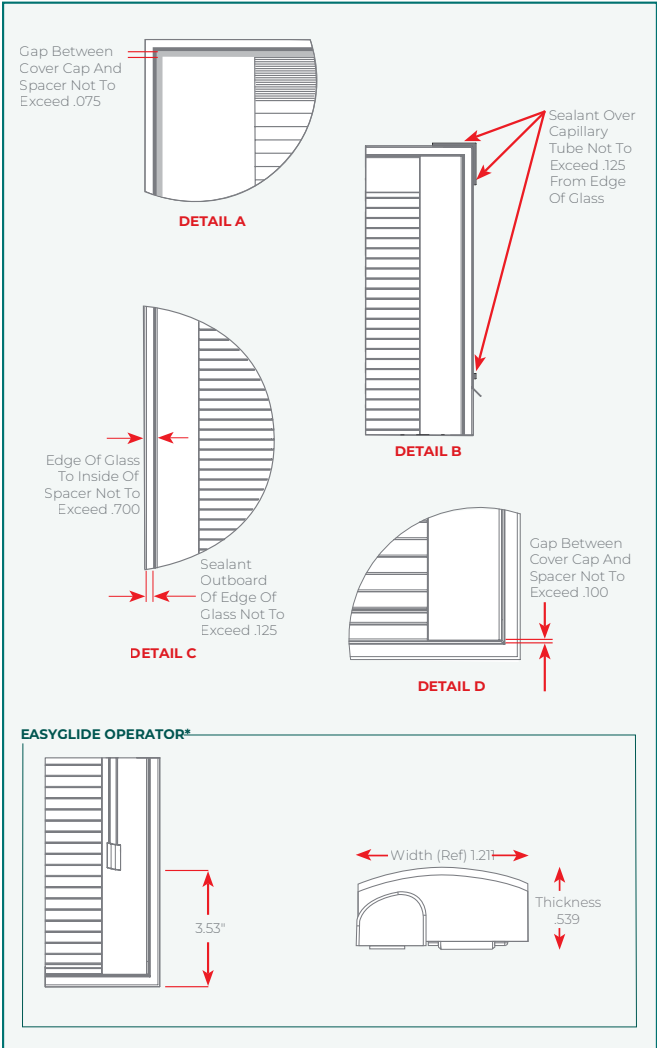

MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Clear or Low-E)	Annealed (limited to 15ft²) or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (i89)
Glass Tint	Solar Gray or Solar Bronze glass panel
Blind Slat	10 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer


1" BLINDS + GLASS
FOR SLIDING PATIO DOORS AND WINDOWS

Technical Drawings & Specifications

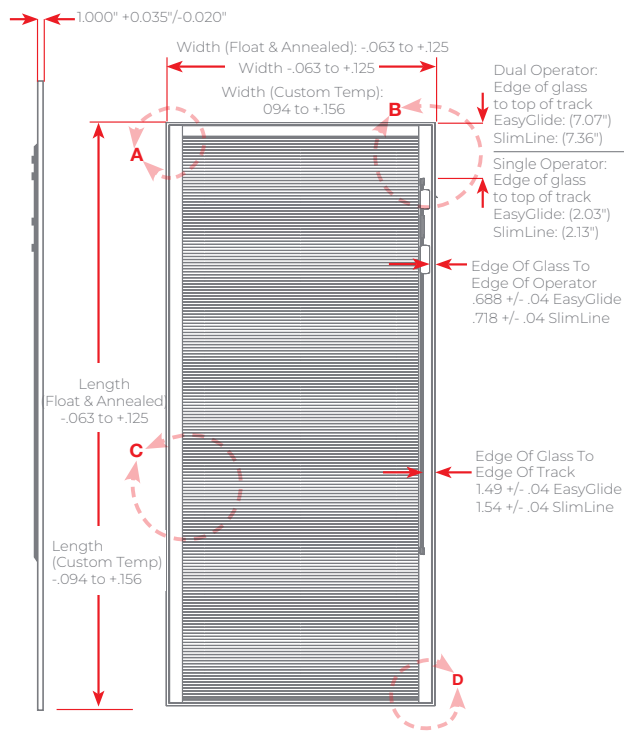

OPERATION	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
SlimLine Operator	Single Shot
Dual Operator (minimum 48" high)	Up to 17 ft²
Dual or Single Operator	See size chart for details
Single Operator	Annealed glass: Up to 12 ft² Tempered glass: Up to 12 ft²
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 32" in height)


CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036 (Annealed) & C1048 (Tempered)
ANSI (safety)	ANSI / WCMA A100.1
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

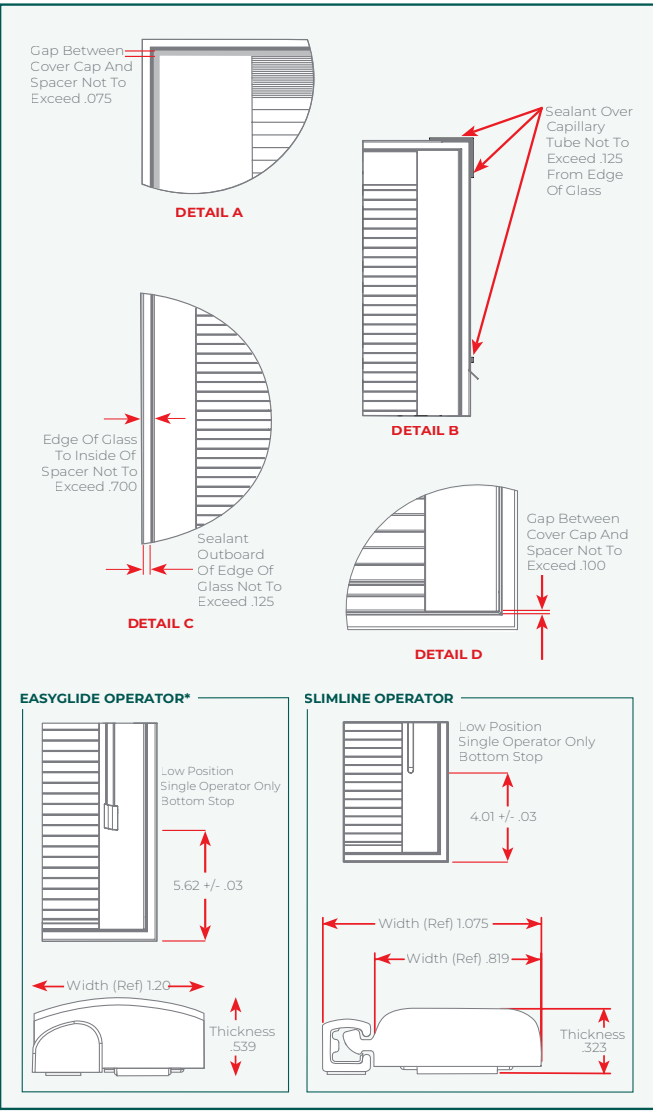

MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Clear or Low-E)	Annealed (limited to 15ft²) or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (i89)
Glass Tint	Solar Gray or Solar Bronze glass panel
Blind Slat	12.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer


1" BLINDS + GLASS XL
FOR SLIDING PATIO DOORS AND WINDOWS

Technical Drawings & Specifications

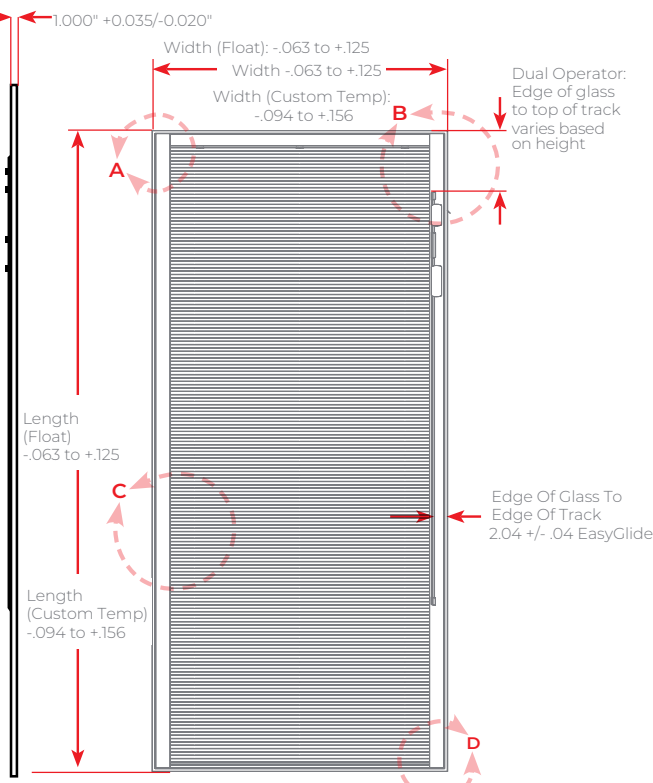

OPERATION	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Dual Operator	Up to 28 ft²
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right

CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	C1048 (Tempered)
ANSI (safety)	ANSI / WCMA A100.1
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

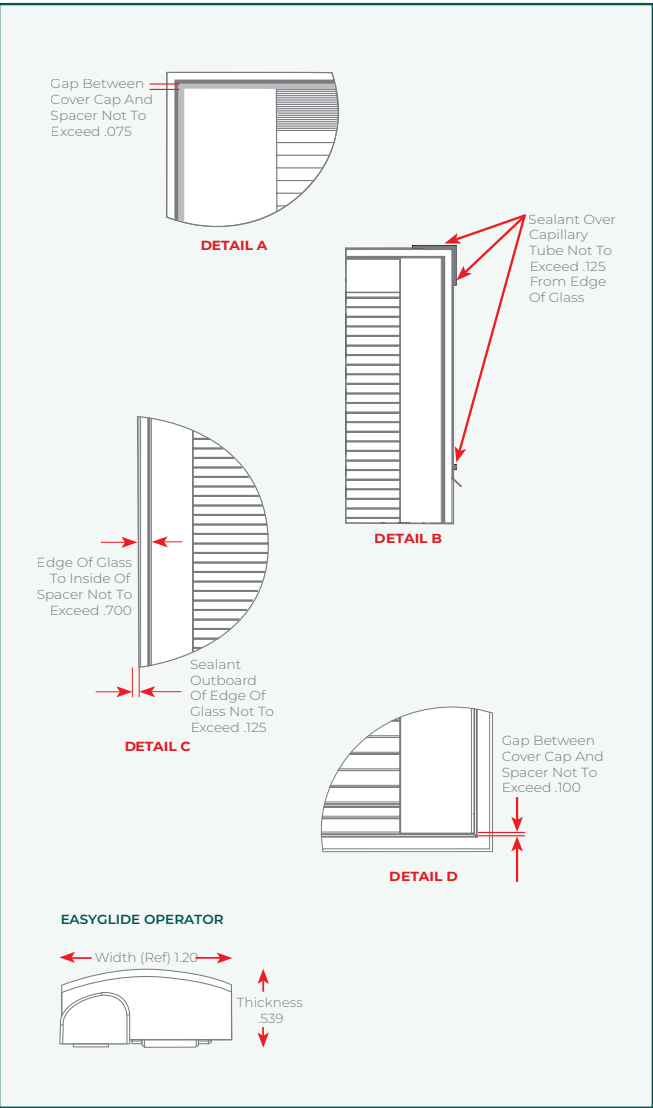

MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Clear or Low-E)	4mm tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (i89)
Blind Slat	10mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer



IG PANEL PROGRAM DETAILS

	7/8" RLT-Top	7/8"	1"	1" XL
IG WIDTH RANGES IG HEIGHT RANGES IG THICKNESS	15"-54" wide 12"-41" tall 7/8" thick or 1" (with 6mm external glass option)	8"-48" wide 18"-80" tall 7/8" thick or 1" (with 6mm external glass option)	8"-80" wide 14"-80" tall 1" thick or 1 1/8" (with 6mm external glass option)	9"-63" wide 46"-90" tall 1" thick
MAXIMUM SQ FT	9	18	17	28
GLASS TYPE	Tempered or Annealed glass up to 9 ft ²	Tempered glass up to 18 ft ² Annealed glass up to 15 ft ²	Tempered glass up to 17 ft ² Annealed glass up to 15 ft ²	Tempered glass only up to 28 ft ²
LOW-E OPTIONS	Single: 270, 272, 340, 366 Dual: i89/270, i89/272, i89/340, i89/366	Single: 270, 272, 340, 366 Dual: i89/270, i89/272, i89/340, i89/366	Single: 270, 272, 340, 366 Dual: i89/270, i89/272, i89/340, i89/366	Single: 270, 272, 340, 366 Dual: i89/270, i89/340, i89/366, i89/272
GLASS TINT	Solar Gray or Solar Bronze	Solar Gray or Solar Bronze	Solar Gray or Solar Bronze	N/A
OPERATOR QUANTITY	Single Operator Only	Single Operator 48" Or Less Dual Operator 48" Or Greater	Single Operator up to 12ft ² , Dual Operator 48" High Or Greater	Dual Operator Only
OPERATOR OPTIONS	Top center operator position IG only EasyGlide design 0.512" thickness	High or low operator position Left or right-hand operator EasyGlide design 0.539" thickness	High or low operator position Left or right-hand operator EasyGlide design 0.539" thickness SlimLine design* 0.323" thickness	Left or right-hand operator EasyGlide design 0.539" thickness
BLIND COLOR	Espresso, Silver Moon, Slate, Tan, White	Espresso, Silver Moon, Slate, Tan, White	Espresso, Silver Moon, Slate, Tan, White	Espresso, Silver Moon, Slate, Tan, White
MINIMUM QUANTITY	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1
WORKING DAYS TO DELIVER	Annealed: 8 business days + transit Tempered: 12 business days + transit	Annealed: 8 business days + transit Tempered: 12 business days + transit	Annealed: 8 business days + transit Tempered: 12 business days + transit	Tempered: 19 business days + transit
10 YEAR WARRANTY	✓	✓	✓	✓

- * SlimLine Operator available in white
- + Widths below 10" will have an asymmetrical design
- See size chart for limitations



WARNING!
Cancer and Reproductive Harm -
www.P65Warnings.ca.gov